



Be ahead




VIRGO SMART BT A20



24V electromechanical swinging gate operator with articulated arm for residential use.

CODE	NAME	DESCRIPTION
P930129 00002	VIRGO SMART BT A20	24V electromechanical operator with built-in control board for swinging gates up to 2m in length and 200Kg. Manoeuvre time in 14sec and electromechanical limit switches.
R930150 00004	VIRGO SMART BT A20 DOUBLE KIT	24V electromechanical operator with built-in control board for swinging gates up to 2m in length and 200Kg. Manoeuvre time in 14sec and electromechanical limit switches. Double Kit (Master and Slave)

THALIA LIGHT MAIN FEATURES

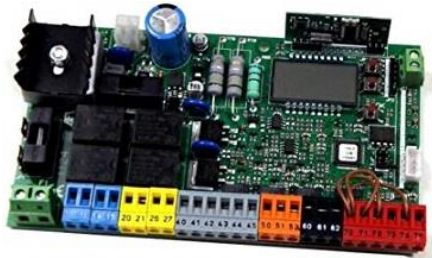

- Control board with an LCD display and removable terminal blocks with new standard colour-coding;
- Possibility to manage a single or double electromechanical swinging gate motor;
- Dual channel receiver;
- Possibility to set the auxiliaries as SCA (Gate Open Light), magnetic lock, electric lock, alarm, stair light, courtesy light, zone light, flashing light, monostable radio channel;
- Slowdown during opening and closing;
- D-Track anti-crushing technology embedded;
- U-Link interconnectivity protocol embedded;
- Beba slot that allows the user and the installer to remotely control the gate motor with smartphones and laptops.




U - CONTROL APPLICATION



INTERNET



GATE MOTOR

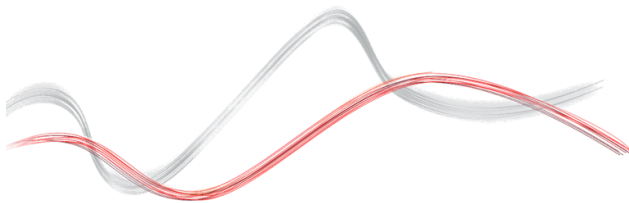

BFT Automation Sydney Branch
 29 Bentley St, Wetherill Park, NSW 2164
 T (+61 2) 9757 0677 - F (+61 2) 9725 4225
 www.bft-automation.com
 info@bftaustralia.com.au

BFT Automation Melbourne Branch
 Unit 18 191-195 Greens Road, Dandenong South 3175
 T (+61 3) 9793 1070 - F (+61 3) 9793 2243
 www.bft-automation.com
 info@bftaustralia.com.au

	VIRGO SMART BT A20
Control board	Thalia Light
Motor power	110W
Maximum Angle	120°
Type of limit switches	Electromechanical
Slowdown	Yes
Manual Release	Personalised key
Frequency of use	Residential
Environmental conditions	From -20° C to +55° C
Protecting rating	IP44

ACCESSORIES

	CODE	NAME	DESCRIPTION
	P111775	TFS	Control board with 3 wires management for Virgo Smart. Each operator requires one.
	D111761	ME BT	Control board for 24Vac solenoid lock for 24V automatic system.
	P111494	BEBA WI-FI GATEWAY	Wi-Fi expansion card to control the automation through smartphones and laptops via Wi-Fi and 4G. Wi-Fi signal required at the gate motor.
	N728052	LAS	Slide lever for Virgo Smart. Maximum leaf weight 100Kg.
	N998600	AMV	Mechanical stop for 1 operator.
	N999735	AAP	Misaligned doors accessory.
	D111906	MITTO B RCB04 R1	Transmitter with 4 channels. Range 50/100m and power supply 12V with one battery type 23 A.
	N999629	MITTO B RCB04 RAINBOW	Pack of four Mitto transmitters with 4 channels in four different colours. Range 50/100m and power supply 12V with one battery type 23 A.
	P121024	Q.BO TOUCH	Wireless digital keypad 433Mhz rolling code.
	P111536	AKTA A30	Pair of hard-wired photocells with the possibility to adjust the beam 180° horizontally and 20° vertically. Range 30m and power supply 24V AC/DC.
	P111537	ERIS A30	Pair of wireless photocells with the possibility to adjust the beam 180° horizontally and 20° vertically. Range 30m and power supply 24V AC/DC.
	P125008	VIRGO BAT	Set of batteries backup for Virgo and Virgo Smart BT A.
	MAGLOCK600	MAG LOCK 600	12 - 24V DC front or side magnetic lock with a holding force of 600Kg.
	VIRO 24V AC	VIRO 24V AC	24V AC electric lock.

